

Audio / Video / Ethernet / GPI

ComMEDIA

A/V Commentary BOX

Box ComMEDIA

Audio-Video Double Commentary Station with Fiber Pair or Hybrid Fiber interconnection (SMPTE-311m) Full featured Console with integrated SDI Videos In/Out and HDMI outs, GPI and Ethernet 1GB

Video sources for commentator monitors selectable from main panel(SDI and HDMI)

Dedicate button allow private talk between Commentators

Four Additional Analog Audio In/Out available on back with Mic/Line selection Power Supply on PowerCon Connector



Automatic and Manual Fiber Swap



Connected to Console via Fiber Pair with Automatic Redundancy

Box Control UNIT

All connections and controls in a single rack

The controls on Front Panel allow microphone sensibility gain adjustments, others settings and Fiber Switching Control. Automatic and Manual fiber swap Redundant Fiber: if a fiber line fail, ComMEDIA automatically swap to second

1RU Remote Panel available and WEBPAGE control

Control UNIT


- 8 In/Out Analog audio on D-Sub25 (2x)
- 2 In/Out Video 3G-SDI
- Ethernet 1GigaBit
- 4 Tally In / 2 GPI Out / RS422
- Pair Fibers on Neutrik Optical DUO*

Commentary BOX

- 4 In/Out Analog audio on D-sub25
- 2 In/Out SDI Video
- 2 Switchable HDMI Out
- Ethernet 1GigaBit
- 4 Tally Out / 2 GPI In / RS422
- Fiber Pair on Hybrid Connection*
- Neutrik PowerCON

SISTEM SIGNAL FLOW

fiber of pair

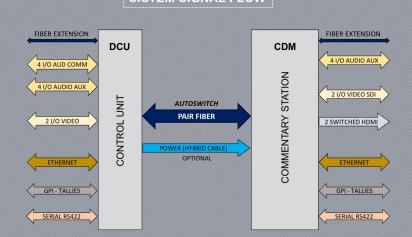

LEMO SMPT





PAIR LC



*Connectors

Choose Preferred Fiber Connector For Control Unit/terminal Panel and Console. With Hybrid models, Power Supply to Console is also provided.



Via Sorrento, 21 20153 Milan Italy



Contacts: <u>marino@remsnc.it</u> <u>claudio@remsnc.it</u> Mob: +39.348.3147783 (Eng)

Mob: +39.335.5277712 (Ita)